


All Dielectric Self-Supporting Aerial Fiber Optical Cable ADSS

Cable Drawing

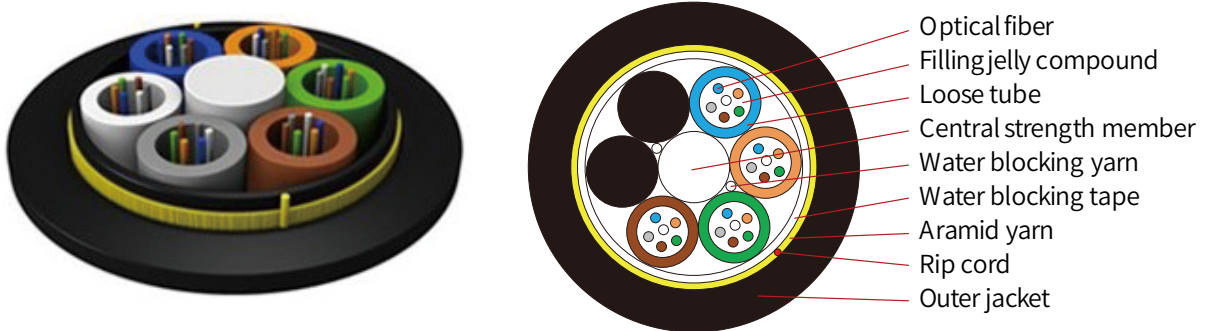

Features

- Erect continuously
- Excellent resistance to electric tracking with AT sheath
- Light weight and small cable diameter reduce ice, wind and load on towers and supports
- Large span: more than 1000 meters
- Excellent tensile and temperature properties

Technical Information

Fiber Count	Structure	RTS(N)	MAT(N)	EDS(N)	CSM Diameter/pad Diameter (mm)	Cable Diameter (mm)	Cable Weight (Kg/km)
12	1+4	5800	2600	1400	2.3/2.3	10.5±0.5	82
24	1+4	5800	2600	1400	2.3/2.3	10.5±0.5	83
36	1+4	5800	2600	1400	2.3/2.3	10.5±0.5	89
48	1+6	6400	2800	1500	2.6/2.6	11.1±0.5	94
72	1+6	6400	2800	1500	2.6/2.6	11.1±0.5	95
96	1+8	7200	3200	1700	3.0/3.9	12.5±0.5	122
144	1+12	9800	4400	2400	4.2/6.6	15.2±0.5	187