


Central Tube Armored Outdoor Fiber Cable GYXTW

Cable Drawing

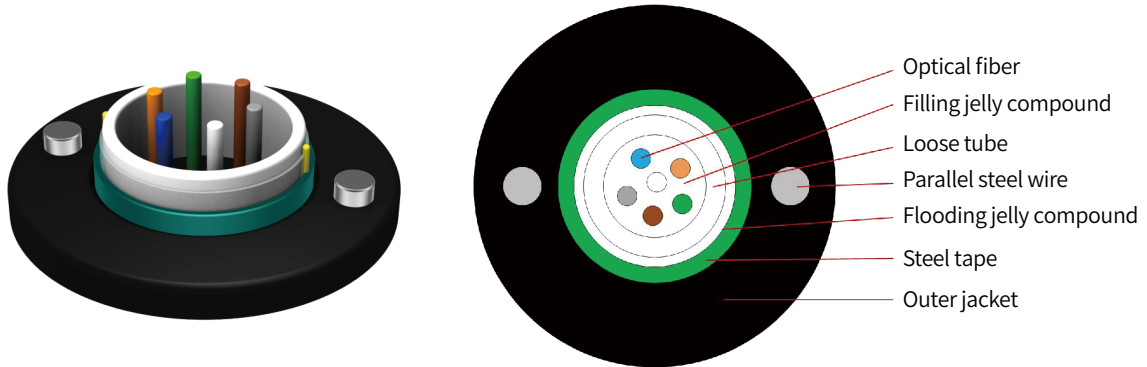

Features

- High strength loose tube that is hydrolysis resistant
- Special tube filling compound ensure a critical protection of fiber
- Crush resistance and flexibility
- PSP enhancing moisture-proof
- Two parallel steel wires ensure tensile strength
- Small diameter, light weight and friendly installation

Technical Information

Fiber Count	Structure	Fibers Per Tube	Loose Tube Diameter (mm)	Tensile Strength Long/Short Term(N)	Crush Resistance Long/Short Term(N/100m)	Bending Radius Static/Dynamic (mm)	Cable Diameter (mm)	Cable Weight (Kg/km)
2	UNITUBE	2	2.4±0.1	600/1500	300/1000	10D/20D	8.3 ±0.5	72
4	UNITUBE	4	2.4±0.1	600/1500	300/1000	10D/20D	8.3 ±0.5	72
6	UNITUBE	6	2.4±0.1	600/1500	300/1000	10D/20D	8.3 ±0.5	72
8	UNITUBE	8	2.4±0.1	600/1500	300/1000	10D/20D	8.3 ±0.5	72
12	UNITUBE	12	2.4±0.1	600/1500	300/1000	10D/20D	8.3 ±0.5	73
24	UNITUBE	24	3.2±0.1	600/1500	300/1000	10D/20D	9.1±0.5	85