


# Fiber Adapter Panel

## Features

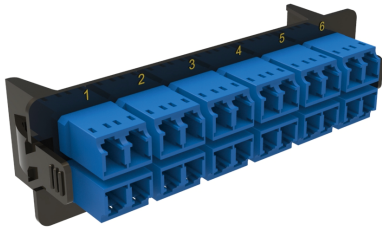

- LC/SC/MPO adapters option
- Low loss performance
- Compact High Density Design
- Available 0 - 24 ports fiber configurations
- Quick removal and easy-to-install without requiring tools
- Blank panels are available used as covers
- Facilitates easy upgrade to 40G

Profiber's fiber adapter panel includes tool-less plastic rivets for quick and easy installation, along with protective caps to keep unused ports dust free. A variety of adapter panels (LC/SC/MTP/MPO) are compatible with our modular fiber optic distribution frames.

## Technical Data

Mechanical Data	Value
Dimensions (WxDxH)	26mm (1.02" ) x 93mm (3.66" )
Weight	0.05 kg
Material	Plastic ABS+PC, UL94-V0
Connection Type	LC-DX/SC-SX/MTP/MPO adaptor
Sleeve Material	Ceramic
Adapter Color	Blue, Green, Aqua, Violet, Black

## Environmental Data

Description	Value
Flammability Rating	UL94-V0
Fully Compliant	IEC 61754, TIA/EIA 568

## Ordering Information

-	X	X	X	X	X
Type	Adaptor	Polish	Fiber Mode	Ports	Insertion Loss
HDFP	1=LC/Duplex 2=SC/Simplex 3=MPO 4=MTP	1=UPC 2=APC	1=OS1 2=OS2 3=OM1 4=OM2 5=OM3 6=OM4 7=OM5	1= 0 2=6P 3=8P 4=12P 5=24P	1=Low Loss 2=Standard Loss

Note : SC Connector Capacity Max. 12F, 0 Port is blank panel.

Example:

HDFP 11242 Means : High Density Fiber Panel, LC/UPC, Duplex, OS2, 12 Ports, Standard loss.