


Indoor Simplex/Duplex Fiber Optic Cable GJAFJV(H)

Cable Drawing

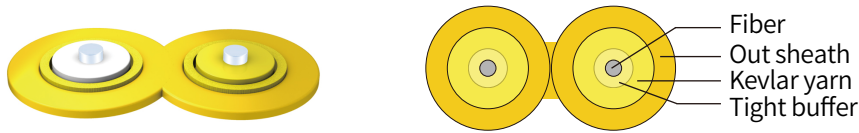

Features

- Excellent uniformity of the outer diameter of tight buffer fiber and excellent strippability
- Excellent performance of flame-retardant
- Steady performance both in extremely high and low temperature
- Excellent geometrical dimension of the fiber

Technical Information

Fiber Count	Cable Diameter (mm)	Cable Weight (Kg/ km)	Tensile Strength Long/Short Term(N)	Crush Resistance Long/Short Term (N/100m)	Bending Radius Static/Dynamic
1	1.6	2.6	40/80	100/500	10D/20D
1	1.8	2.9	40/80	100/500	10D/20D
1	2.0	3.9	60/100	100/500	10D/20D
1	2.2	4.9	60/100	100/500	10D/20D
1	2.4	5.8	80/150	100/500	10D/20D
1	2.8	6.6	80/150	100/500	10D/20D
1	3.0	7.8	80/150	100/500	10D/20D
1	3.2	12.2	100/200	100/500	10D/20D
1	4.0	12.2	150/300	100/500	10D/20D

Fiber Count	Cable Diameter (mm)	Cable Weight (Kg/ km)	Tensile Strength Long/Short Term(N)	Crush Resistance Long/Short Term (N/100mm)	Bending Radius Static/Dynamic
2	1.6×3.4	5.2	40/80	100/500	10D/20D
2	1.8×3.7	5.8	40/80	100/500	10D/20D
2	2.0×4.1	7.8	60/100	100/500	10D/20D
2	2.4×4.9	9.8	60/100	100/500	10D/20D
2	2.8×5.7	11.6	80/150	100/500	10D/20D
2	3.0×6.1	13.6	80/150	100/500	10D/20D