


Non-metallic Strength Member Loose Tube Stranded Fiber Cable GYFS

Cable Drawing

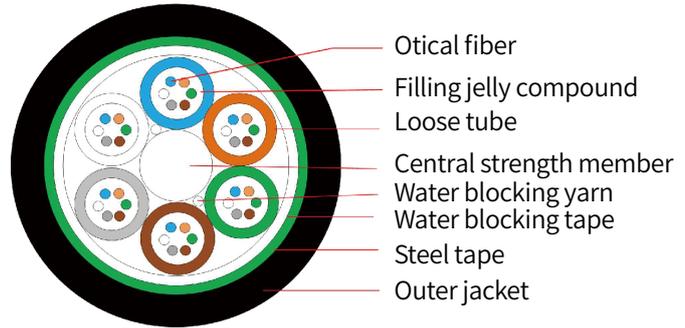

Features

- All section water blocking
- Anti-ultraviolet radiation
- Excellent transmission, mechanical and environmental performance
- Customized color strip, easy installation and maintenance

Technical Information

Fiber Count	Structure	Fibers Per Tube	Loose Tube Diameter (mm)	Tensile Strength Long/Short Term(N)	Crush Resistance Long/Short Term(N/100mm)	Bending Radius Static/Dynamic (mm)	Cable Diameter (mm)	Cable Weight (Kg/km)
12	1+6	6	1.8±0.1	600/1500	300/1000	10D/20D	10.7±0.5	99
24	1+6	6	1.8±0.1	600/1500	300/1000	10D/20D	10.7±0.5	100
48	1+6	12	2.0±0.1	600/1500	300/1000	10D/20D	11.2±0.5	109
72	1+6	12	2.0±0.1	600/1500	300/1000	10D/20D	11.2±0.5	111
96	1+6	12	2.0±0.1	600/1500	300/1000	10D/20D	12.5±0.5	137
144	1+6	12	2.0±0.1	600/1500	300/1000	10D/20D	15.3±0.5	198